


PERBAIKAN TANAH

DENGAN CARA DINAMIS DAN STATIS


DAN DENGAN MENGGUNAKAN GEOSINTETIK

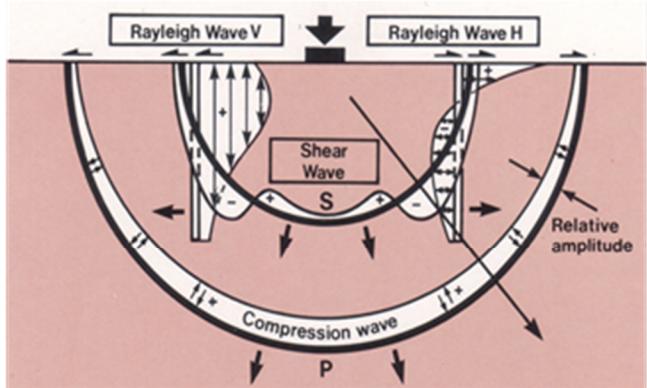

Standard mat for sealing.




Mat with slab construction, and two-dimensional pliability for very soft subgrades.




Flexible mat to protect against hydrostatic loads, with hydraulic filtering stability and water permeability (drainage surface), two-dimensional pliability, positional stability and heavy weight.





Filter-point mat with drains for low hydrostatic loads.







Grid profile mat for technical/environmental slope protection above the waterline.




Tubular mat with drains for low to medium hydrostatic loads.

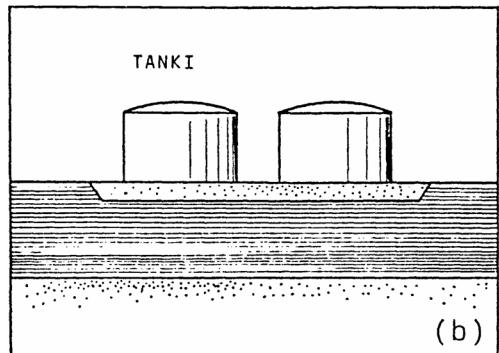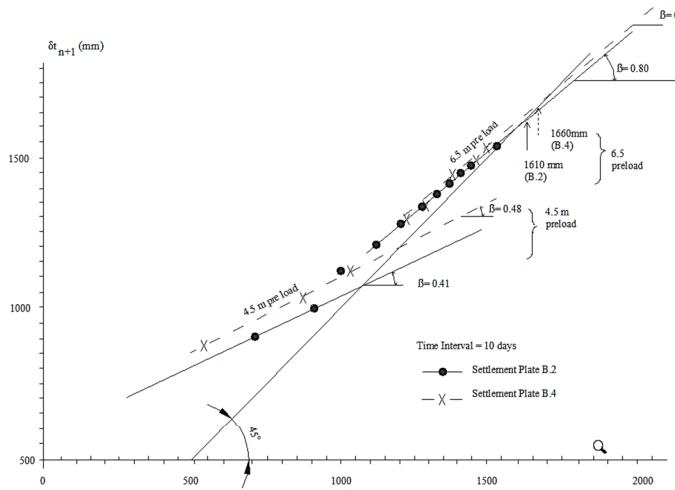

(b)

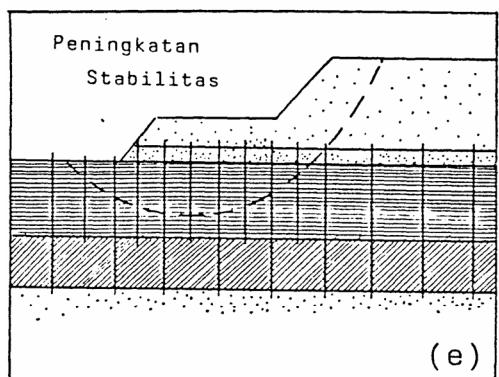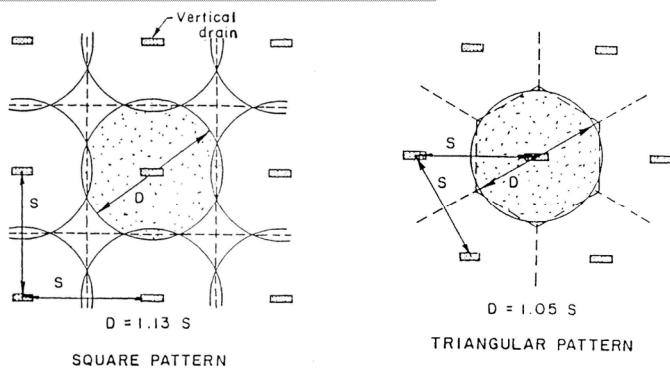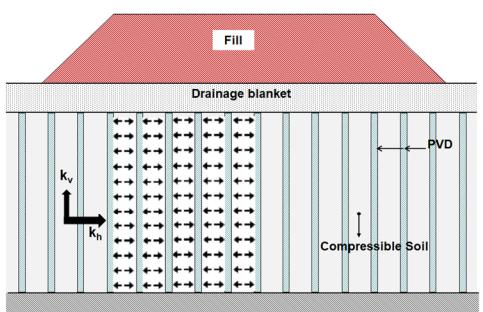

(e)

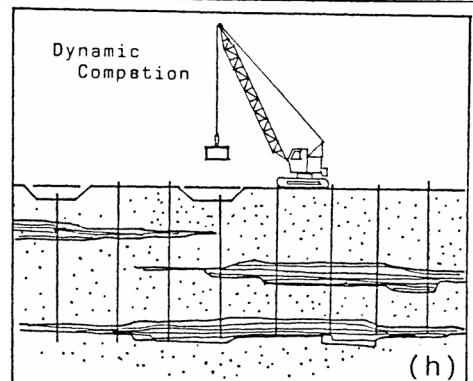

(h)

DAFTAR ISI

Chapter A – Pemadatan Tanah dengan Cara Dinamis

| | |
|--|----|
| A-1 Pemadatan Dinamis untuk Mengurangi Bahaya Likuifaksi Tanah Akibat Gempa..... | 1 |
| A-2 Dynamic Compaction on Coralline Soil..... | 15 |
| A-3 Vibro-Compaction, Some Examples on the Construction Difficulties | 23 |

Chapter B – Pemadatan Tanah dengan Cara Statis

| | |
|--|----|
| B-1 Prakompresi dengan Vertical Drain Sintetik | 39 |
| B-2 Satisfactory Performance of Monolithic Prefabricated Vertical Drain..... | 57 |

Chapter C – Geosintetik

| | |
|--|------------|
| C-1 Geosintetik dan Aplikasinya dalam Teknik Sipil | 73 |
| C-2 Faktor Rangkak dalam Pemilihan Geosintetik untuk Perkuatan Tanah | 91 |
| C-3 Penggunaan Geosintetik untuk Mempercepat Pelaksanaan Embankment Jalan..... | 99 |
| Lampiran | 109 |